
OFFICE - EXAMPLE LAYOUT

LAYOUT

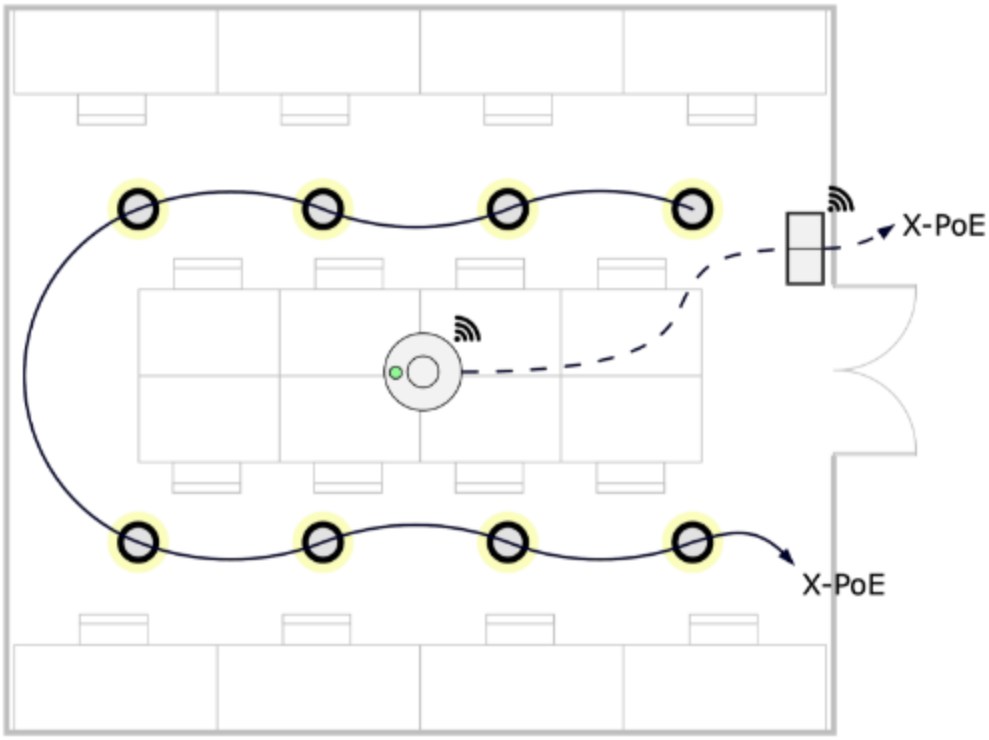


Smaller, more subdivided spaces typically are optimized for maximum controls density and circuit level control. Lower power fixtures are daisy chained to consume the entire power budget of an X-PoE port. In the above scenario, one X-PoE port provides power to the low power LED fixtures, while another X-PoE port provides power to the 3rd party wireless controls system via a standard IEEE PD. The X-PoE lighting controller is housed remotely, along with it's power supply, and the 3rd party control system host. The X-PoE lighting controls system is integrated with the 3rd party control system via API and/or MQTT.

FIXTURES

- 3rd party 36V 275mA LED fixtures are daisy chained, up to 2.23A. For more information, see D1.2 - Output Power Range.

- Multiple fixtures/X-PoE port, utilizing **2 channel** X-PoE PD:

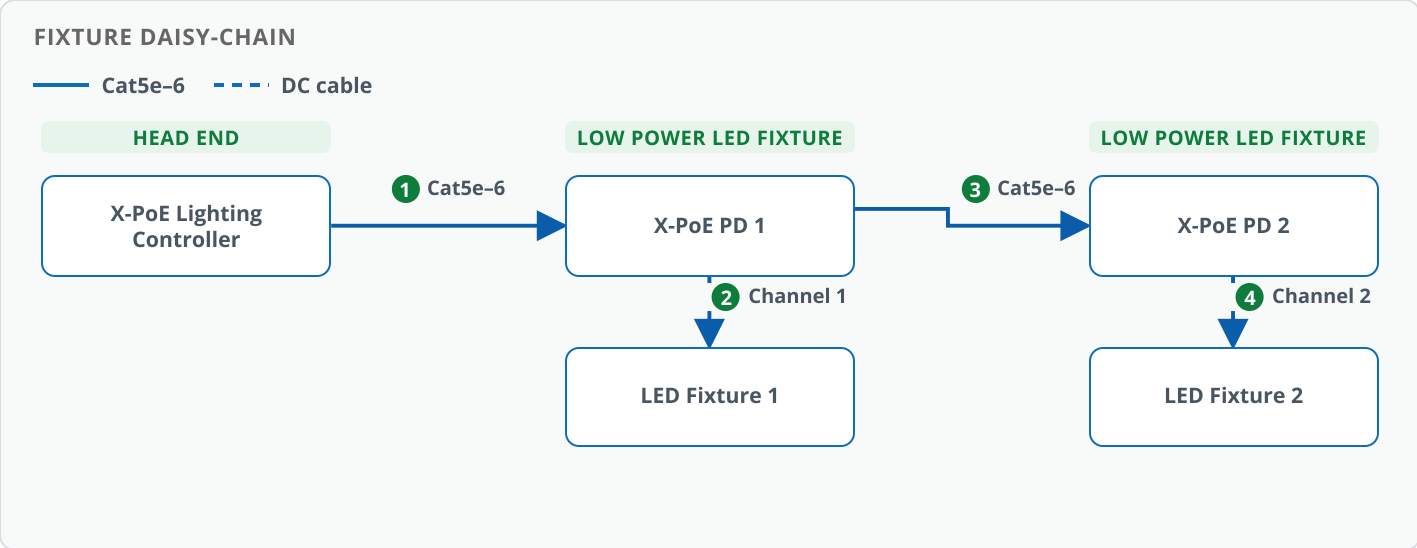


FIXTURES ARE DISTRIBUTED AMONGST 2 CHANNELS.

Although the Luum switch supports 2.23A max/port, two channel ports support a maximum of 1.115A each. In this example, the fixtures are split amongst the two channels to distribute the load.

CONTROLS

- 3rd party wireless lighting controls system, integrated with X-PoE. For more information, see D6.1 - Integration.
- 24V power bus to devices from standard IEEE PoE PD:

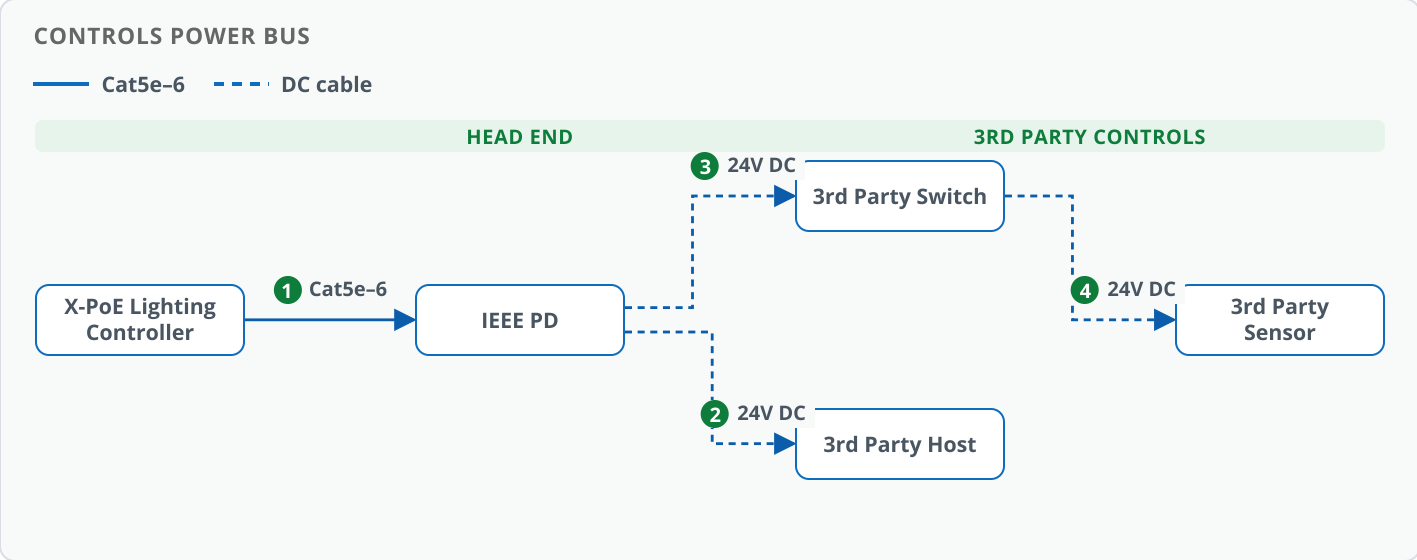

SYSTEM COMPONENTS

Qty	Description	Vendor	Part Number
8	3rd Party LED Light Fixtures X-PoE PDs	n/a Luum.io	n/a XPD-P2H-G (enclosed PD)
n/a	3rd Party Wireless Control System (motion sensors, switches, wireless gateway (not shown))	n/a	n/a
1	Standard IEEE PoE to 24V PD (not shown)	n/a	n/a
1	8 Port X-PoE Lighting Controller Power Supply (not shown)	Luum.io n/a	XS-108H (power supply not included)

RELATED INFORMATION

Technical Support

Questions about this office layout can be sent to support@luum.io.

Document Feedback

While we have taken great care to ensure the accuracy and completeness of this document, we welcome your feedback and suggestions. If you notice any errors or omissions, or feel a topic could benefit from further explanation, please email your feedback to support@luum.io.

Revision History

Date	Revision	Notes
11/3/2026	A	Converted to the current guide format.

Disclaimer

All rights, title, and interest in and to this guide, including without limitation all copyright, trademark, patent, trade secret, and other proprietary rights, belong solely and exclusively to Luum.io and/or its licensors. This guide is provided solely for the purpose of showing an example office X-PoE layout, and no license or other rights are granted or implied hereby. No part of this guide may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of Luum.io. The contents of this guide are subject to change without notice. The information contained herein is provided on an 'as is' basis and is for informational purposes only. Luum.io makes no warranty, express or implied, as to the accuracy, completeness, or usefulness of this information, nor does it assume any legal liability or responsibility for the consequences of any errors or omissions therein. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.